In the Claims

1. **(currently amended):** A colour filter comprising areas of at least three different colours, wherein at least one area has its maximal visible light transmittance at a wavelength of from 520 to 540 nm and comprises a compound of formula

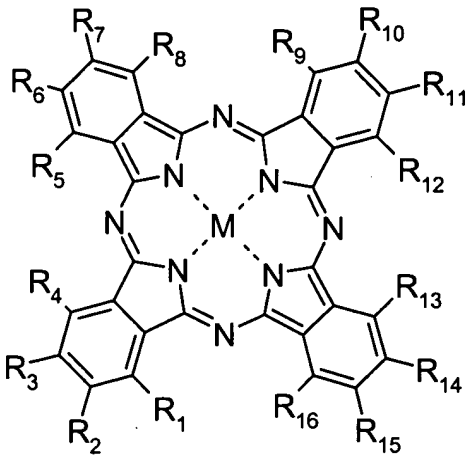

(I)

dispersed in a high molecular weight material,

in which formula (I) R_1, R_2, R_3, R_4, R_5, R_6, R_7, R_8, R_9, R_{10}, R_{11}, R_{12}, R_{13}, R_{14}, R_{15} and R_{16} are each independently from the others selected from the group consisting of H, F, Cl, Br, OH and

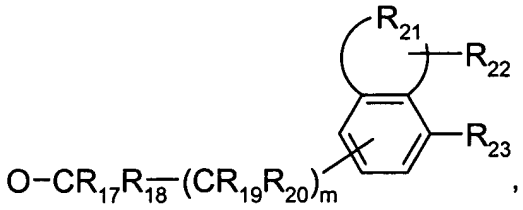

,

R_{17}, R_{18}, R_{19} and R_{20} are independently from the others H or F, m is 0 or 1,

R_{21} is 2 H, $(CH_2)_3$, $(CH_2)_4$, $(CH)_4$, $(CH)_2CH_2$, $(CH)_2(CH_2)_2$ or $CH_2(CH)_2CH_2$,

R_{22} and R_{23} are independently from each other H, OH, Cl, NO_2, $CONHR_{24}$ or $NHCOR_{24}$, R_{24} is methyl, ethyl or n-propyl, and

M is 2 H, Cu, Co, Ni or Zn,

with the proviso that at least one of R_1, R_2, R_3 and R_4, none or one of R_5, R_6, R_7 and R_8, none or one of R_9, R_{10}, R_{11} and R_{12}, and none or one of R_{13}, R_{14}, R_{15} and R_{16} are selected from the group

consisting of OH and  ,

and all other R_1, R_2, R_3, R_4, R_5, R_6, R_7, R_8, R_9, R_{10}, R_{11}, R_{12}, R_{13}, R_{14}, R_{15} and R_{16} are selected from the group consisting of H, F, Cl and Br.

2. **(original):** A colour filter according to claim 1, wherein R_1, R_2, R_3, R_4, R_5, R_6, R_7, R_8, R_9, R_{10}, R_{11}, R_{12}, R_{13}, R_{14}, R_{15} and R_{16} are selected from the group consisting of H, OH and

 and each one of R_1, R_2, R_3 and R_4, one of R_5, R_6, R_7 and R_8, one of R_9, R_{10}, R_{11} and R_{12}, and one of R_{13}, R_{14}, R_{15} and R_{16} are selected from the group consisting of OH and

 .

3. **(currently amended):** A colour filter according to claim 1 ~~or 2~~, wherein the area which has its maximal visible light transmittance at a wavelength of from 520 to 540 nm comprises from 1 to 75% by weight, ~~preferably from 5 to 50% by weight, with particular preference from 25 to 40% by weight,~~ based on the overall weight of the area, of a compound of formula (I).

4. **(currently amended):** A colour filter according to claim 1, ~~2 or 3,~~ further comprising a yellow colorant.

5. **(original):** A liquid crystal display comprising a colour filter according to claim 1 and a luminescent backlight source emitting green light, from 90 to 100 energy-% of which green light has a wavelength of from 500 to 560 nm.

6. **(currently amended):** A composition for making colour filters comprising from 0.01 to 40% by weight, ~~preferably from 1 to 25% by weight, with particular preference from 5 to 10% by weight,~~ based on the overall weight of the composition, of a compound of formula (I) according to claim 1.

7. **(currently amended):** A composition according to claim 6, which additionally ~~also~~ comprises from 5 to 500 weight-% of a polymerisable compound, based on the compound of formula (I).

8. **(currently amended):** ~~The use of a colour filter according to claim 1 in a~~ A liquid crystal display comprising a colour filter according to claim 1.

9. **(original):** A compound of formula (I) according to claim 1, with the proviso that said compound is not a 1,8,15,22-, 2,9,16,23-, 2,9,16,24-, 2,9,17,24- or 2,10,16,24-tetrahydroxy phthalocyanine.

10. **(original):** A mass-coloured high molecular mass organic material comprising

(i) from 0.05 to 70% by weight, based on the sum of (i) and (ii), of a compound of formula (I) according to claim 1; and

(ii) from 99.95 to 30% by weight, based on the sum of (i) and (ii), of a high molecular mass organic material.

11. **(currently amended):** A liquid crystal display comprising: a colour filter comprising areas of at least three different colours, wherein at least one area has its maximal visible light transmittance at a wavelength of from 520 to 540 nm, ~~preferably from 520 to 530 nm,~~ and which area comprises a phthalocyanine compound; and a luminescent backlight source emitting green light, from 90 to 100 energy-% of which green light has a wavelength of from 500 to 560 nm.

12. **(new):** A colour filter according to claim 1, wherein the area which has its maximal visible light transmittance at a wavelength of from 520 to 540 nm comprises from 5 to 50% by weight, based on the overall weight of the area, of a compound of formula (I).

13. **(new):** A colour filter according to claim 1, wherein the area which has its maximal visible light transmittance at a wavelength of from 520 to 540 nm comprises from 25 to 40% by weight, based on the overall weight of the area, of a compound of formula (I).

14. **(new):** A composition for making colour filters comprising from 1 to 25% by weight, based on the overall weight of the composition, of a compound of formula (I) according to claim 1.

15. **(new):** A composition for making colour filters comprising from 5 to 10% by weight, based on the overall weight of the composition, of a compound of formula (I) according to claim 1.

16. **(new):** A liquid crystal display according to claim 11, wherein the area which comprises a phthalocyanine compound has its maximal visible light transmittance at a wavelength of from 520 to 530 nm.